


## The Combiner



### FILTER FOR CLEAR, PLEASANT-TASTING WATER FOR GASTRONOMY AND VENDING

Clear, pleasant-tasting water is essential in the gastronomy and vending sectors. Even if the local mains water contains low levels of calcium or minerals, professionally calibrated water optimisation is both required and essential for filtering out solids and removing any extraneous odours and tastes.

BWT besttaste filter cartridges with integrated prefiltration provide top-quality water for vending and coffee machines and the many other services in the hospitality industry. They are also excellent for prefiltration before the water is processed by BWT bestaqua ROC reverse osmosis systems. Solids and unwanted contaminants and odours are eliminated efficiently, guaranteeing perfect-tasting hot drinks and a high level of protection for all the equipment and appliances in soft water areas.

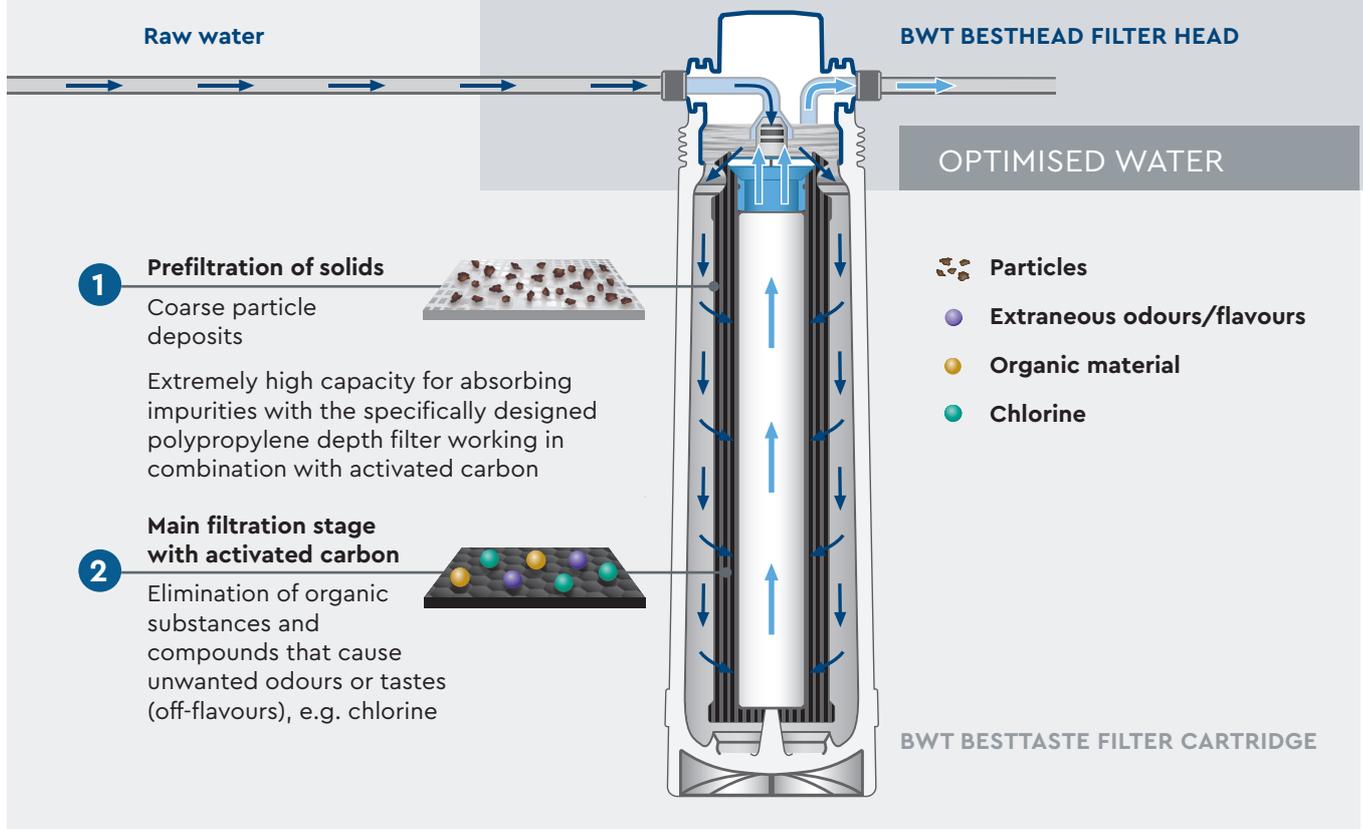

## TECHNICAL DATA


BWT besttaste	10	15	20
Typical capacity in litres	10,000	40,000	60,000
Particle filtration in µm	1	1	1
Total height without bracket in mm (A)	287	368	403
Wall mounting bracket height in mm (B)	249	330	365
Connection height in mm (C)	226	307	342
Ø Filter cartridge in mm (D)	88	88	105
Approx. weight in kg (dry/wet)	0.5/1.1	0.6/1.5	0.86/1.8
Filter cartridge order No.	428123680	428123690	428123700

### Key benefits

- Activated carbon filter system with integrated high-performance prefiltration
- Particularly well suited to mains water containing heavy concentrations of solids and where demand for water is high
- Perfect for optimising water for use in the gastronomy
- Removal of solids, off-flavour substances and chlorine from the mains water
- Can be used with mains water with low carbonate hardness (calcium content)
- Easy to install using universal BWT besthead FLEX connection technology
- High sensory grade of filtrate


### Technical data

- Integrated high-performance prefiltration of solids
- High filter capacity
- High-quality activated carbon
- Activated carbon polypropylene fleece for consistently crystal-clear water
- Reduces the heavy metal content
- Quick and easy filter replacement
- Can be installed vertically or horizontally

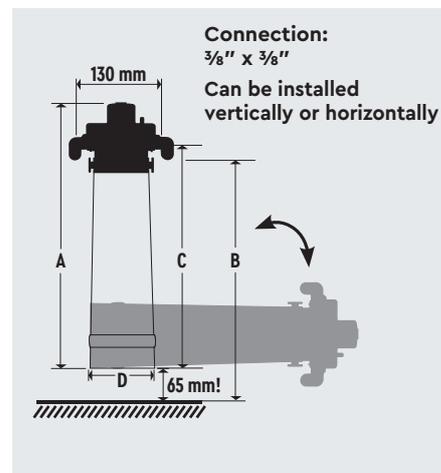

### OPERATING CONDITIONS

Inlet pressure: 2 – 8 bar  
Water temperature: 4 – 30 °C  
Ambient temperature: 4 – 40 °C

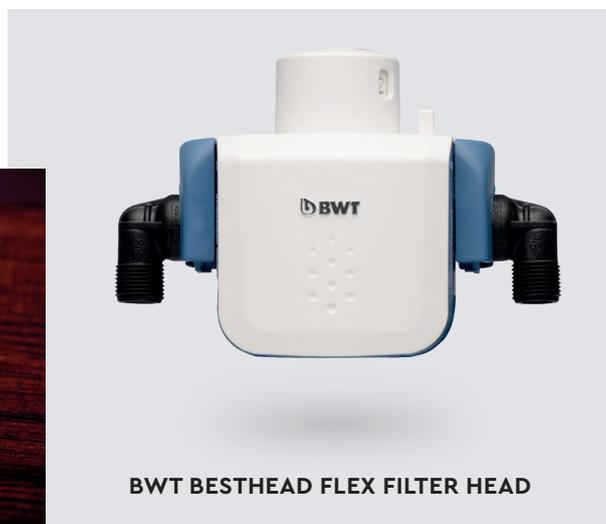

## ACCESSORIES

Description	Order No.
BWT besthead FLEX filter head	428124200
BWT besthead FLEX set 1 BWT BESTHEAD FLEX Waterblock 3/4" Hose Flex Fitting Flex 3/8" 3/4"	656525575

### MANUFACTURER:

BWT water + more GmbH  
Walter-Simmer-Str. 4  
A-5310 Mondsee

@waterforcoffeelovers

[www.bwt.dk/horeca](http://www.bwt.dk/horeca)

### SALES:

BWT Denmark: salg@bwt.dk · Tel.: +45 43 600 500

BWT Sweden: info@bwtwater.se · Tel.: +46 40691 4500

BWT Norway: firmapost@bwtwater.no · Tel.: +47 6717 7000

BWT Finland: info@bwtwater.fi · Tel.: +358 (0)2-436 7300

